




# MOTOR PERFORMANCE CHARACTERISTICS

|                  |         |      |         |         |                            |         |            |       |         |
|------------------|---------|------|---------|---------|----------------------------|---------|------------|-------|---------|
| T<br>E<br>S<br>T | VOLTS   | 415  | HERTZ   | 50      | R<br>A<br>T<br>I<br>N<br>G | FRAME   | 4 INCH SUB | HP    | 3       |
|                  | ST.MFD  |      | RUN MFD |         |                            | MODEL   | 234326     | VOLTS | 380-415 |
|                  | TEST PR | 8190 | PAGE    | 5-H     |                            | RPM     | 2875       | PHASE | 3       |
|                  | APPR BY | MEM  | DATE    | 8/12/97 |                            | S.F.    | 1.00       | HERTZ | 50      |
|                  |         |      |         |         | TYPE                       | 3 PHASE |            |       |         |

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.  
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

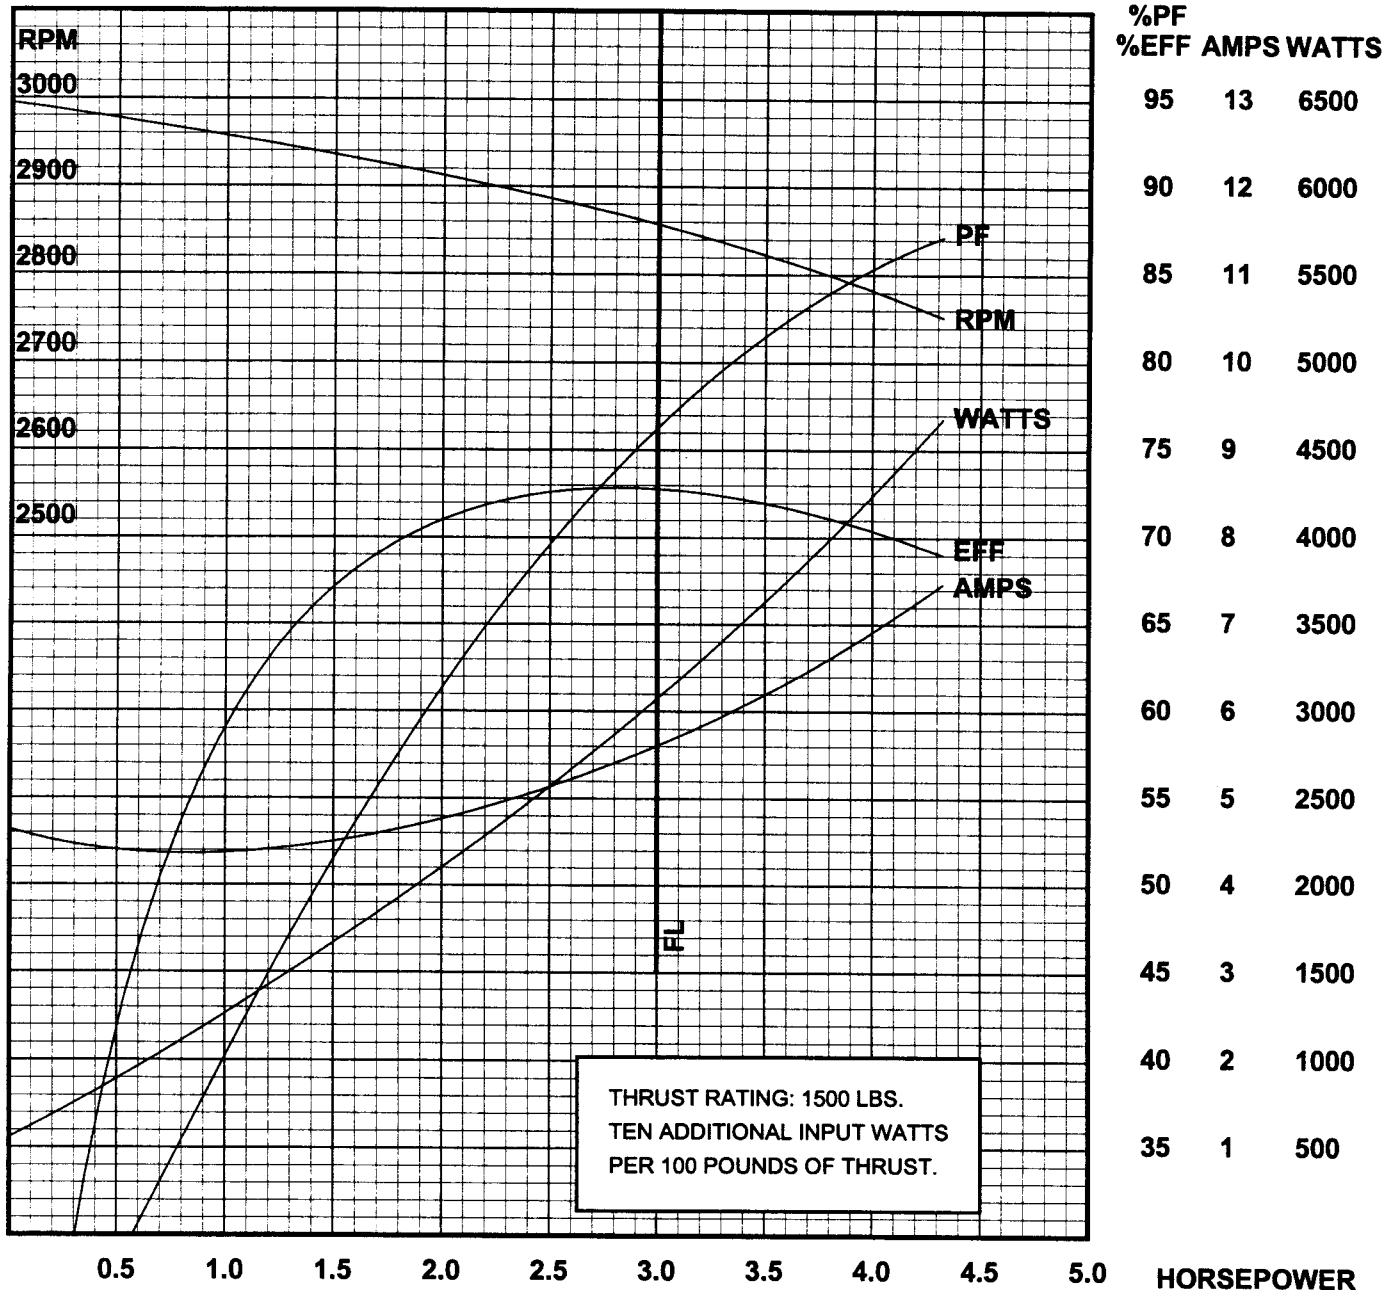

|                     |      |       |
|---------------------|------|-------|
| FULL LOAD TORQUE    | 66.2 | LB-IN |
| BREAKDOWN TORQUE    | 181  | LB-IN |
| LOCKED ROTOR TORQUE | 179  | LB-IN |
| LOCKED ROTOR AMPS   | 29.5 |       |

CURVE NO. 336981-701