


MOTOR PERFORMANCE CHARACTERISTICS

TEST	VOLTS	415	HERTZ	50	RATING	FRAME	4 INCH SUB	HP	5
	ST.MFD		RUN MFD			MODEL	234327	VOLTS	380-415
	TEST PR	8201	PAGE	1-1		RPM	2875	PHASE	3
	APPR BY	MEM	DATE	8/12/97		S.F.	1.00	HERTZ	50
					TYPE	3 PHASE			

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.
 TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

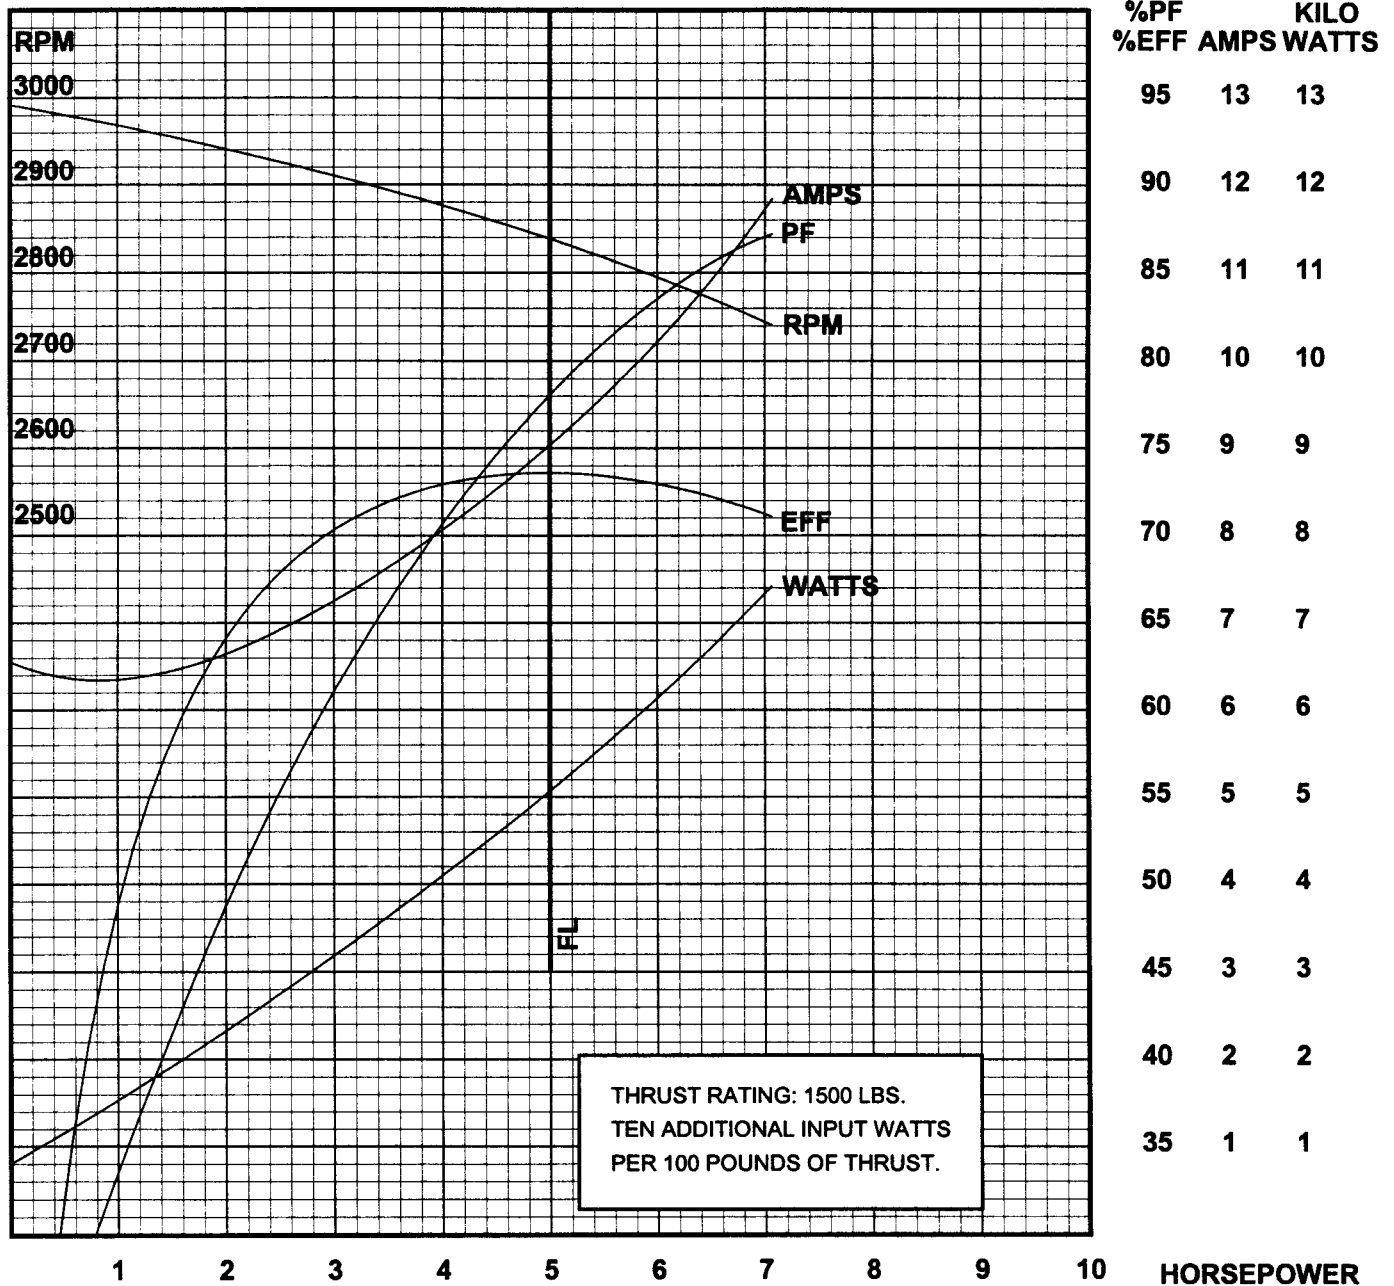

FULL LOAD TORQUE	111	LB-IN
BREAKDOWN TORQUE	340	LB-IN
LOCKED ROTOR TORQUE	354	LB-IN
LOCKED ROTOR AMPS	50.4	

CURVE NO. 336982-701