


MOTOR PERFORMANCE CHARACTERISTICS

| | | | | |
|----------------------------|---------|------|---------|----|
| T E S T | VOLTS | 380 | HERTZ | 50 |
| | ST.MFD | | RUN MFD | |
| | TEST PR | 8271 | PAGE | 3 |
| | APPR BY | | DATE | |

| | | | | |
|--|-------|------------|-------|---------|
| R A T I N G | FRAME | 4 INCH SUB | HP | 1 |
| | MODEL | 234563 | VOLTS | 380-415 |
| | RPM | 2875 | PHASE | 3 |
| | S.F. | 1.00 | HERTZ | 50 |
| | TYPE | 3 PHASE | | |

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

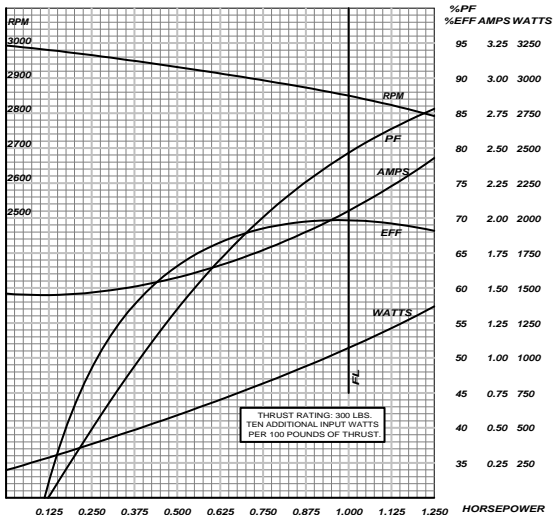

FULL LOAD TORQUE 22.1 LB-IN
 BREAKDOWN TORQUE 49.5 LB-IN
 LOCKED ROTOR TORQUE 42.9 LB-IN
 LOCKED ROTOR AMPS 8.9