




MOTOR PERFORMANCE CHARACTERISTICS

T	VOLTS	400	HERTZ	50	R	FRAME	4 INCH SUB	HP	5
E	ST. MFD		RUN MFD		A	MODEL	234527	VOLTS	380-415
S	TEST PR	8295	PAGE	7-F	T	RPM	2875	PHASE	3
T	APPR BY	<i>JW</i>	DATE	4-15-93	I	S.F.	1	HERTZ	50
					N	TYPE	3 PHASE		
					G				

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

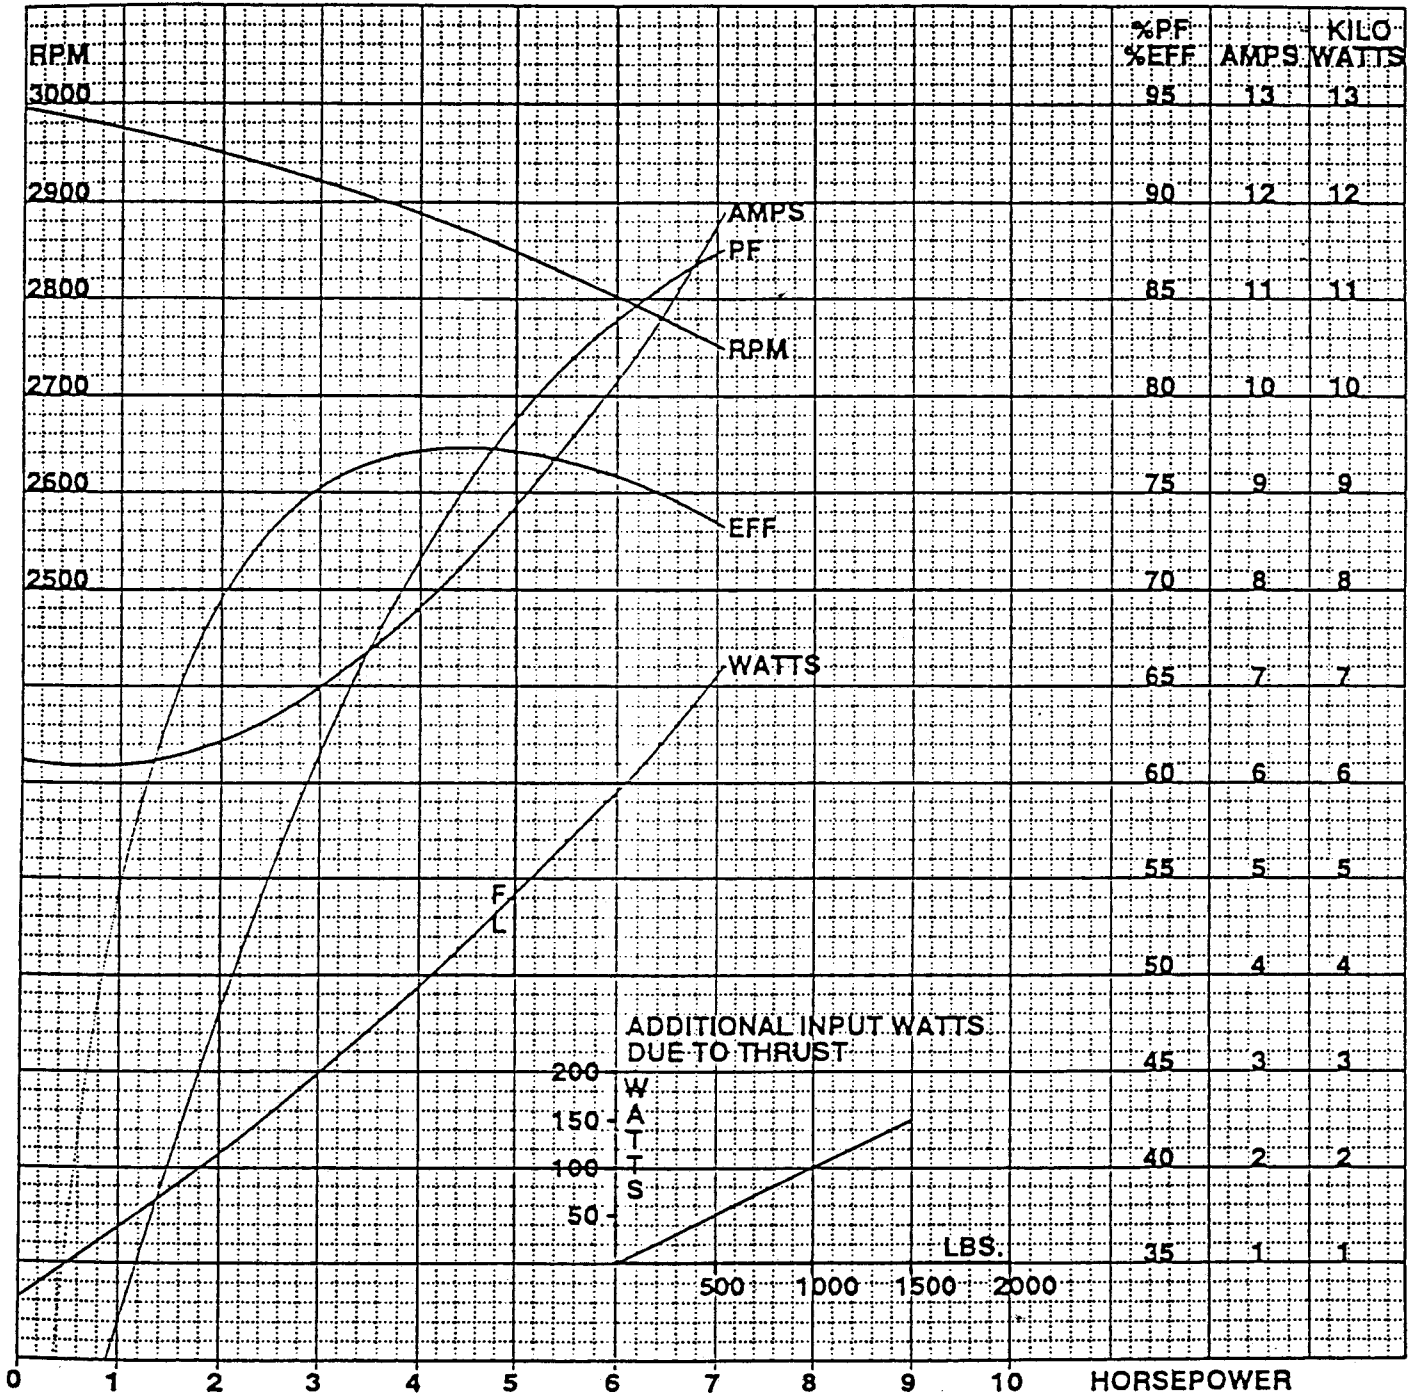

FULL LOAD TORQUE 110.6 LB-IN
 BREAKDOWN TORQUE 320 LB-IN
 LOCKED ROTOR TORQUE 345 LB-IN
 LOCKED ROTOR AMPS 49

CURVE NO. 337610-701