


## MOTOR PERFORMANCE CHARACTERISTICS

|                  |         |      |         |    |                                 |       |         |       |         |
|------------------|---------|------|---------|----|---------------------------------|-------|---------|-------|---------|
| T<br>E<br>S<br>T | VOLTS   | 400  | HERTZ   | 50 | R<br>A<br>T<br>I<br>O<br>N<br>G | FRAME | 8" RW   | kW    | 67      |
|                  | ST.MFD  |      | RUN MFD |    |                                 | MODEL | 263262  | VOLTS | 380-415 |
|                  | TEST PR | 8707 | PAGE    | 1  |                                 | RPM   | 2930    | PHASE | 3       |
|                  | APPR BY |      | DATE    |    |                                 | S.F.  | 1.00    | HERTZ | 50      |
|                  |         |      |         |    |                                 | TYPE  | 3 PHASE |       |         |

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.

TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

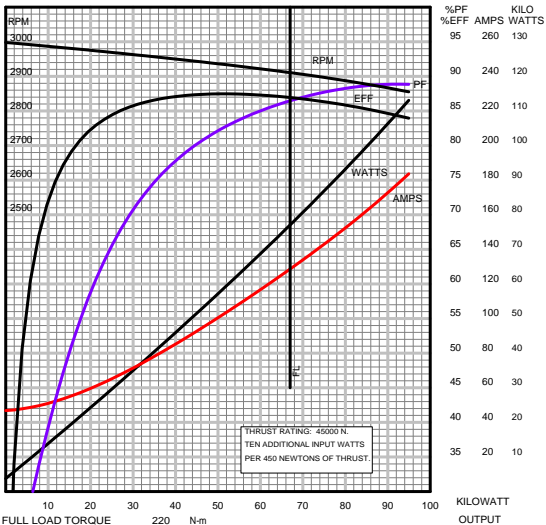

|                     |     |     |
|---------------------|-----|-----|
| FULL LOAD TORQUE    | 220 | N-m |
| BREAKDOWN TORQUE    | 660 | N-m |
| LOCKED ROTOR TORQUE | 392 | N-m |
| LOCKED ROTOR AMPS   | 826 |     |

CURVE NO. 326128-702