




MOTOR PERFORMANCE CHARACTERISTICS

| | | | | | | | | | |
|------------------|---------|------|---------|----|---------------------------------|---------|--------|-------|---------|
| T E S T | VOLTS | 415 | HERTZ | 50 | R A T I O N G | FRAME | 8" RW | kW | 93 |
| | ST.MFD | | RUN MFD | | | MODEL | 263615 | VOLTS | 380-415 |
| | TEST PR | 8690 | PAGE | 1 | | RPM | 2925 | PHASE | 3 |
| | APPR BY | | DATE | | | S.F. | 1.00 | HERTZ | 50 |
| | | | | | TYPE | 3 PHASE | | | |

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.

TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

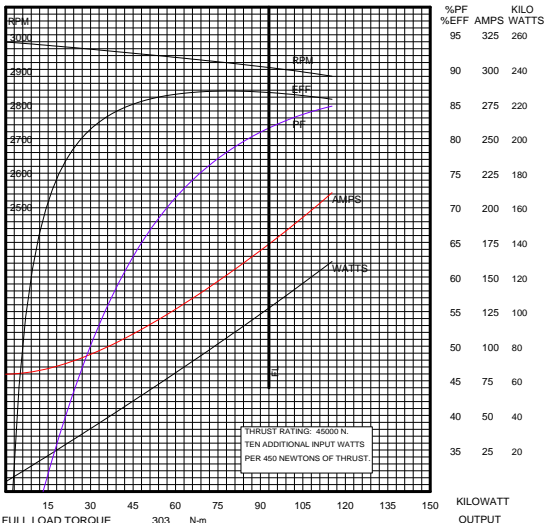

| | | |
|---------------------|------|-----|
| FULL LOAD TORQUE | 303 | N-m |
| BREAKDOWN TORQUE | 1006 | N-m |
| LOCKED ROTOR TORQUE | 674 | N-m |
| LOCKED ROTOR AMPS | 1308 | |

CURVE NO. 326141-703