




MOTOR PERFORMANCE CHARACTERISTICS

T E S T	VOLTS	380	HERTZ	50	R A T I O N G	FRAME	10" RW	KW	110
	ST.MFD		RUN MFD			MODEL	264233	VOLTS	380-415
	TEST PR	8709	PAGE	1		RPM	2910	PHASE	3
	APPR BY		DATE			S.F.	1.00	HERTZ	50
						TYPE	3 PHASE		

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.

TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

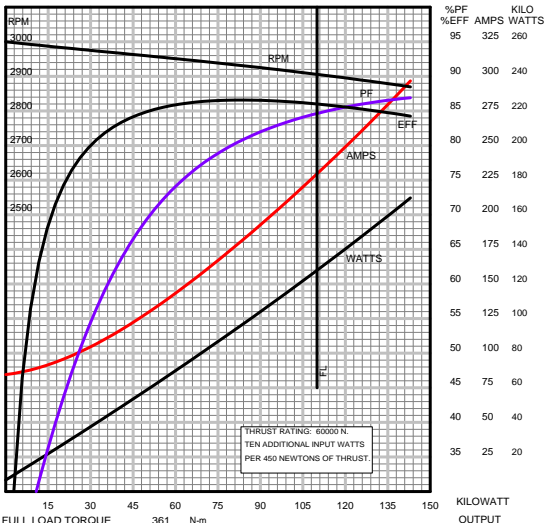

THRUST RATING: 60000 N.
TEN ADDITIONAL INPUT WATTS
PER 450 NEWTONS OF THRUST.

FULL LOAD TORQUE	361	N-m
BREAKDOWN TORQUE	706	N-m
LOCKED ROTOR TORQUE	418	N-m
LOCKED ROTOR AMPS	1095	

CURVE NO. 326158-701