




MOTOR PERFORMANCE CHARACTERISTICS

T E S T	VOLTS	400	HERTZ	50	R A T I N G	FRAME	10" RW	kW	110
	ST.MFD		RUN MFD			MODEL	264233	VOLTS	380-415
	TEST PR	8709	PAGE	1		RPM	2920	PHASE	3
	APPR BY		DATE			S.F.	1.00	HERTZ	50
						TYPE	3 PHASE		

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.

TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

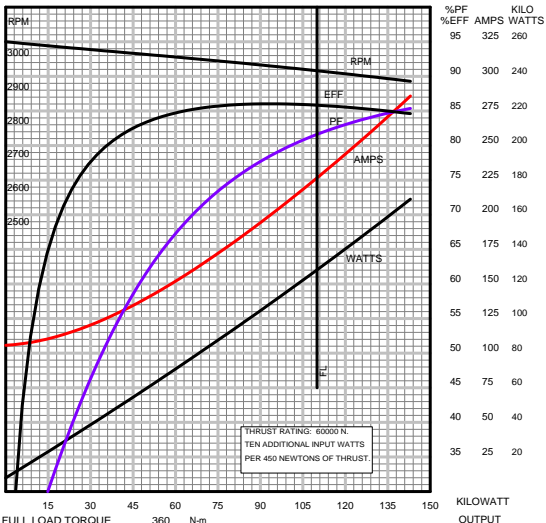

FULL LOAD TORQUE	360	N-m
BREAKDOWN TORQUE	791	N-m
LOCKED ROTOR TORQUE	468	N-m
LOCKED ROTOR AMPS	1158	

CURVE NO. 326158-702