




## MOTOR PERFORMANCE CHARACTERISTICS

T E S T	VOLTS	415	HERTZ	50	R A T I O N G	FRAME	10" RW	kW	130
	ST.MFD		RUN MFD			MODEL	264234	VOLTS	380-415
	TEST PR	8708	PAGE	2		RPM	2920	PHASE	3
	APPR BY		DATE			S.F.	1.00	HERTZ	50
						TYPE	3 PHASE		

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.

TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

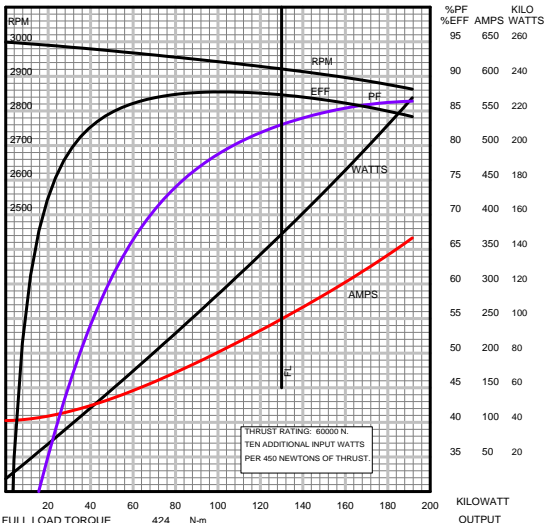

FULL LOAD TORQUE	424	N-m
BREAKDOWN TORQUE	993	N-m
LOCKED ROTOR TORQUE	593	N-m
LOCKED ROTOR AMPS	1400	

CURVE NO. 326168-703