


Submergence Specifications

Pump Series	Models	Minimum submergence above pump inlet. Y – Metres
4" FPS	All models	1.00
6" SR	All models	2.00
8" SR	All models	2.50
10" SSI	All models	1.20
10" FT	180 FT	6.00
10" FT	200 & 260 FT	4.00
12" FT	300 & 400 FT	2.50
14" FT	440 FT	2.50
8" FS	100 & 130 FS	1.20
10" FS	180 FS	1.20
10" FS	200, 260 FS	4.00
12" FS	300 & 400 FS	2.50
14" FS	600 FS	6.00
6" STS	All models	3.00
8" STS	All models	3.00
5" T	All models	0.70
6" T	All models	0.80
7" T	All models	1.00
8" T	All models	1.20
10" T	All models	2.00

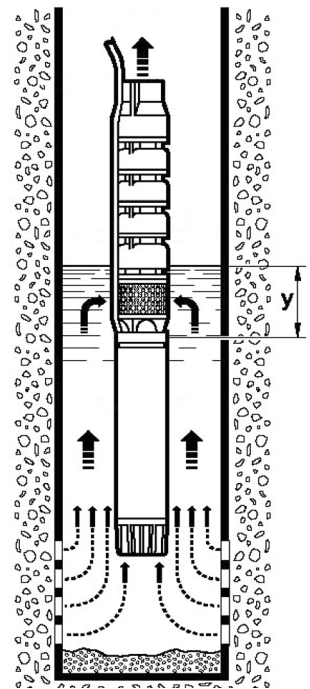

Note:

- Incorrect submergence can lead to cavitation and damage the internals of the pump, impellers and seals.
This type of damage from incorrect submergence would void pump warranty.
- Due to continuous improvement values stated are subject to change.